



STC Rated

Sound Rated


Sample Designs

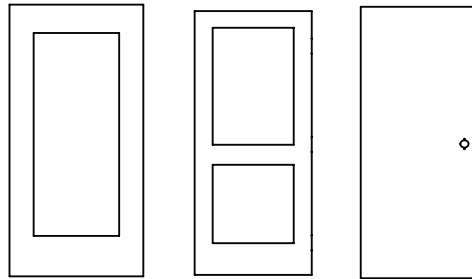

Flush




S107-IFP109



S110-IRP111

Integrity

Two layers of embedded birch plywood blocking for hanging hardware

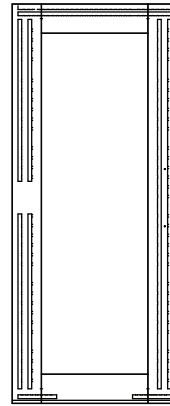

Reinvented

Triple laminated construction
Technology driven
Custom sizes
Design flexibility

Installations

Hotels
Office
Multi-Family

Sample Prep

Solid-Core Doors are 1.75" thick

Most Door Styles


Unrated and 20-minute rated: 32

45-minute and 60-minute rated: 36


90-minute rated: 38

With appropriate hardware gasketing and perimeter sealing


161 lock



Mortise lock



Door guide



Hinges



Fire Rated

LEED Certified

Factory Finishing



www.doorworkscompany.com

Superior Quality. Custom Crafted in North Carolina.